



ARUBA AP-105 ACCESS POINT

The AP-105 is a high-speed, affordable, and reliable 802.11n access point for indoor environments. Designed for both ceiling and wall mounting, the compact AP-105 delivers wire-like performance at data rates up to 300Mbps per radio. The AP-105 is built to deliver years of trouble-free operation and is backed by Aruba's limited lifetime warranty program.

Working in conjunction with Aruba's line of centralized Mobility Controllers, the AP-105 delivers high-speed, secure network services that let users finally move to a "wireless where possible, wired where necessary" network access model. The network can then be *rightsized*, with unnecessary ports eliminated to lower operating costs. The key to rightsizing is Aruba's unique Adaptive Radio Management technology, which manages channel, power, and wireless client behavior to deliver wire-like performance and reliability. By rightsizing network infrastructure, organizations significantly enhance user mobility and efficiency while lowering total cost of ownership.

The multifunction AP-105 can be configured through the controller to provide wireless LAN access, air monitoring, remote networking, secure enterprise mesh, and wireless intrusion detection and prevention over the 2.4GHz and 5GHz RF spectrum. The AP-105 features a 100/1000Base-T Ethernet interface and operates from either standard 802.3af Power over Ethernet (PoE) sources or a 12VDC power supply.



APPLICATION

- High-performance 802.11n enterprise campus or branch office applications, indoor use, concurrent dual-band operation

OPERATING MODE

- Multi-service concurrent 802.11a/n + b/g/n WLAN
- 802.11a/b/g/n air monitor
- Hybrid combination of WLAN/AM
- Remote AP
- Secure Enterprise Mesh
- Configurable to support 802.11n HT 20/40 channels or mixed-mode deployment IEEE 802.11a/b/g/n

RADIOS

- Dual Radio - software configurable, supporting 2.4GHz + 5GHz
- Both radios 802.11n capable, implementing 2x2 MIMO with 2 spatial streams, providing up to 300Mbps per radio

RF MANAGEMENT

- Automatic transmit power and channel management control with auto coverage hole correction via Adaptive Radio Management (ARM)

ADVANCED FEATURES

- Remote AP capable with addition of ArubaOS RAP license
- Integrated Trusted Platform Module (TPM) for secure storage of credentials and keys

POWER

- 48 V DC 802.3af Power over Ethernet
- 12 V DC for external AC supplied power (adapter sold separately)
- Maximum power consumption: 12.5 Watts

WIRELESS RADIO SPECIFICATIONS

- AP type: 2x2 Multiple-In, Multiple-Out (MIMO)
- Supported Frequency Bands (country-specific restrictions apply):
 - 2.400 - 2.4835 GHz
 - 5.150 - 5.250 GHz
 - 5.250 - 5.350 GHz
 - 5.470 - 5.725 GHz
 - 5.725 - 5.850 GHz
- Available Channels: Controller-managed, dependent upon configured regulatory domain
- Supported Radio Technologies:
 - 802.11b: Direct-Sequence Spread-Spectrum (DSSS)
 - 802.11a/g/n: Orthogonal Frequency Division Multiplexing (OFDM)
 - 802.11n: 2x2 MIMO with 2 spatial streams
- Supported Modulation Types:
 - 802.11b: BPSK, QPSK, CCK
 - 802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM
- Transmit Power: Configurable in increments of 0.5 dBm
- Maximum Transmit Power:
 - 2.4GHz: 23 dBm (limited by local regulatory requirements)
 - 5 GHz: 23 dBm (limited by local regulatory requirements)
- Maximum Ratio Combining (MRC) for improved receiver performance
- Association Rates (Mbps):
 - 802.11b: 1, 2, 5.5, 11
 - 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54
 - 802.11n: MCS0 - MCS15 (6.5Mbps - 300Mbps)
- 802.11n High-Throughput (HT) Support: HT 20/40
- 802.11n Packet Aggregation: A-MPDU, A-MSDU

ARUBA AP-105 ACCESS POINT

ANTENNA

- 4 x integrated, omni-directional antenna elements (supporting up to 2x2 MIMO with spatial diversity)
- Maximum antenna gain:
 - 2.4 GHz / 2.5 dBi
 - 5.150 GHz - 5.875 GHz / 4.0 dBi

INTERFACES

- Network:
 - 1 x 100/1000Base-T Ethernet (RJ45), Auto-sensing link speed and MDI/MDX
- Power:
 - 1 x DC power connector
- Other:
 - 1 x RJ-45 console interface

MOUNTING

- Standard:
 - Wall
 - Tool-less ceiling tile rail (15/16")
- Optional mounting kit:
 - Desk Stand & Wall Outlet Mount Plate
 - Solid wall mount bracket
 - Wall box mount bracket (fits standard US single gang wall boxes)
 - Ceiling tile rail adapters (15/16" & 9/16" recessed or non-recessed)

MECHANICAL

- Dimensions / Weight (unit):
 - 5.2" x 5.3" x 1.8" (132 mm x 135 mm x 45 mm)
 - 10.56 oz (0.3 kg)
- Dimensions / Weight (shipping):
 - 7.7" x 6.7" x 2.2" (195 mm x 170 mm x 55 mm)
 - 15.52 oz (0.44 kg)

ENVIRONMENTAL

- Operating:
 - Temp: 0° to 50° C (32° to 122° F)
 - Humidity: 5 to 95% non-condensing
- Storage and Transportation Temperature Range:
 - Temp: -40° to +70° C (-40° to +158° F)

REGULATORY

- | | |
|-----------------------------|-----------------------------------|
| • FCC/Industry of Canada | • CE Marked |
| • R&TTE Directive 1995/5/EC | • Low Voltage Directive 72/23/EEC |
| • EN 300 328 | • EN 301 489 |
| • EN 301 893 | • UL/IEC/EN 60950 |
| • CB Scheme Safety, cTUVus | • Japan MIC/VCCI |
| • Korea KCC | • Brazil ANATEL |
| • Mexico NOM/COFETEL | • China SRRC/CCC |
| • UL2043 Compliant | |

For more country-specific regulatory information, and approvals, please see your Aruba representative.

CERTIFICATIONS

- Wi-Fi Certified 802.11a/b/g/n

WARRANTY

- Limited lifetime warranty



ORDERING INFORMATION

Part number	Description
AP-105	Aruba 105 AP (802.11a/n and b/g/n)
AP-AC-UN	Aruba 12VDC Universal AC Power Adapter Kit - North America, Japan, United Kingdom, Italy, EC (Schuko), Australia, China, India, Korea
AP-105-MNT	Aruba 105 Access Point Mounting Kit for flat surfaces or wall boxes
AP-105-MNT-C	Aruba 105 Access Point Ceiling Mounting Kit (rail adapters)



ARUBA AP-105 ACCESS POINT



RF PERFORMANCE TABLE

	Max TX power per active TX chain (dBm)	RX Sensitivity (dBm)	Max TX power per active TX chain (dBm)	RX Sensitivity (dBm)
	2.4 GHz		5 GHz	
802.11b				
1Mbps	20	-96		
2Mbps	20	-96		
5.5Mbps	20	-94		
11Mbps	20	-93		
802.11a/g				
6Mbps	20	-96	20	-96
9Mbps	20	-96	20	-96
12Mbps	20	-96	20	-96
18Mbps	20	-95	20	-95
24Mbps	20	-92	20	-91
36Mbps	19	-89	19	-88
48Mbps	18	-85	18	-84
54Mbps	17	-83	17	-83
802.11n HT20				
MCS0	20	-96	20	-96
MCS1	20	-95	20	-94
MCS2	20	-93	20	-92
MCS3	20	-90	20	-89
MCS4	19	-87	19	-86
MCS5	18	-82	18	-82
MCS6	17	-81	17	-80
MCS7	15	-80	15	-79
MCS8	20	-95	20	-95
MCS9	20	-93	20	-92
MCS10	20	-91	20	-90
MCS11	20	-87	20	-87
MCS12	19	-84	19	-84
MCS13	18	-81	18	-80
MCS14	17	-80	17	-78
MCS15	15	-77	15	-77
802.11n HT40				
MCS0	20	-93	20	-92
MCS1	20	-93	20	-92
MCS2	20	-90	20	-89
MCS3	20	-86	20	-86
MCS4	19	-83	19	-83
MCS5	18	-79	18	-80
MCS6	17	-77	17	-77
MCS7	15	-76	15	-76
MCS8	20	-92	20	-92
MCS9	20	-89	20	-90
MCS10	20	-87	20	-87
MCS11	20	-84	20	-84
MCS12	19	-82	19	-81
MCS13	18	-76	18	-77
MCS14	17	-76	17	-75
MCS15	15	-73	15	-73


Maximum capability of the hardware provided. Maximum transmit power will be limited by local regulatory settings.

ARUBA AP-105 ACCESS POINT


ANTENNA PLOTS



2.45 GHz

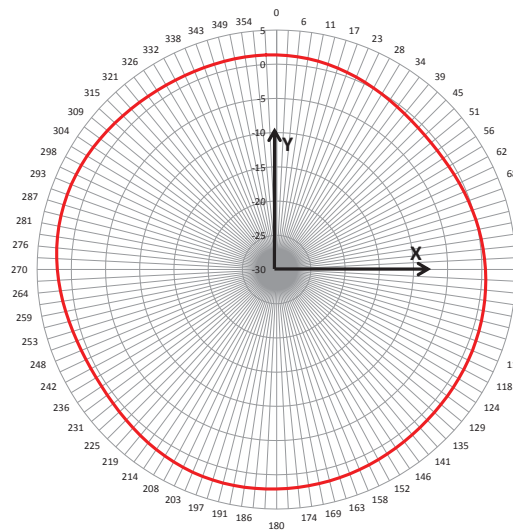


H-Plane

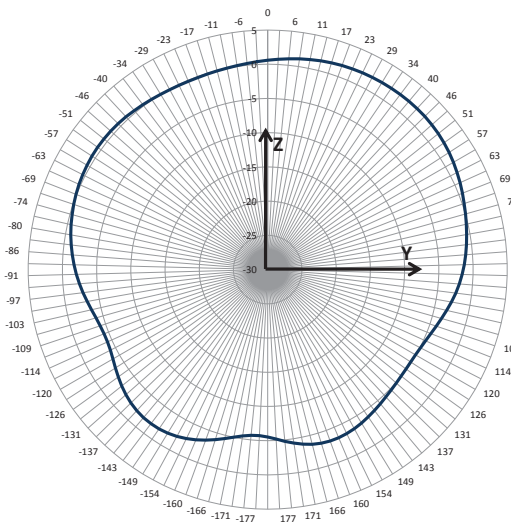


E-Plane

5.5 GHz

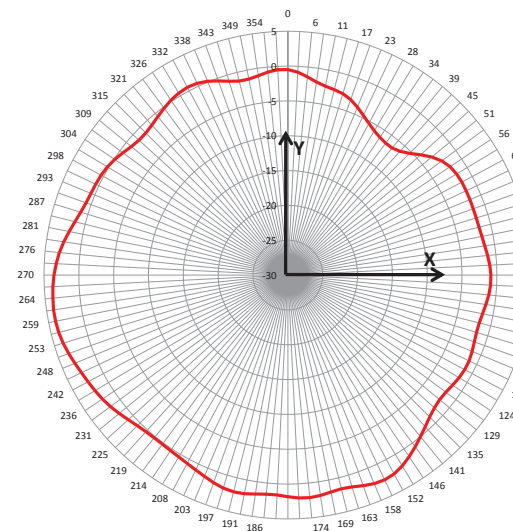

H-Plane

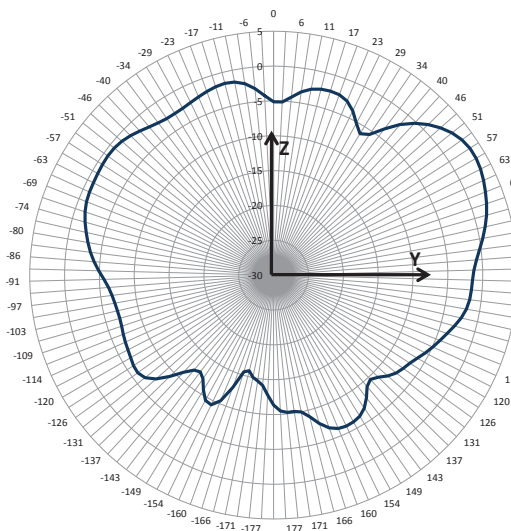

E-Plane



WWW.ARUBANETWORKS.COM

1344 Crossman Avenue. Sunnyvale, CA 94089 | Tel. +1 408.227.4500 | Fax. +1 408.227.4550