

Cisco HyperFlex HX225c M6 and HX225c M6 All Flash Nodes

High-performance clusters in a small footprint

May 2022

Contents

Simplicity you can build on	3
Cisco HyperFlex HX225c M6 Node family	4
Powering next-generation applications	4
Features and benefits	4
Product specifications	5
Ordering information	8
Cisco Unified Computing Services	8
Cisco environmental sustainability	9
Cisco Capital	9
How to buy	9
For more information	9
Document history	10

Today's applications live across a complex, multidomain world—from enterprise data centers and private and public clouds, to campus, branch, and edge locations. Cisco HyperFlex™ systems with AMD EPYC™ processors make it easy to modernize and simplify deployments and operations. Engineered with Cisco Unified Computing System™ (Cisco UCS®) technology, and managed through the Cisco Intersight™ cloud-operations platform, Cisco HyperFlex systems deliver flexible scale-out infrastructure that can rapidly adapt to changing business demands.

Simplicity you can build on

With hybrid and all-flash-memory storage configurations and cloud-based management, Cisco HyperFlex systems are deployed as a preintegrated cluster with a unified pool of resources that you can quickly provision, adapt, scale, and manage to efficiently power your applications and your business (Figure 1). Based on AMD EPYC™ processors, these systems have [world-record-setting processors](#) with up to 128 cores per node, and up to 4 TB of memory per node.

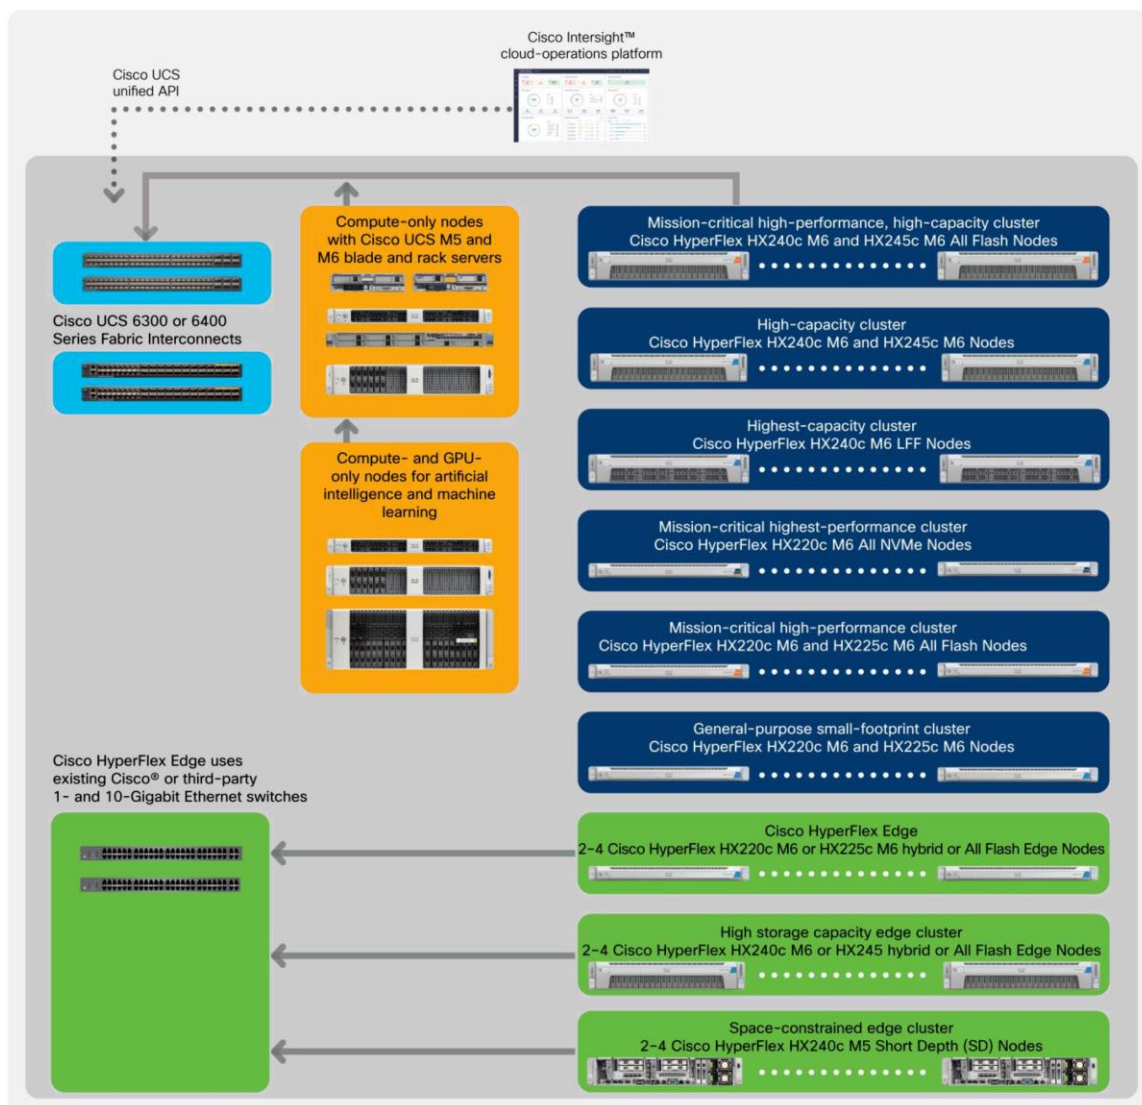


Figure 1.
Cisco HyperFlex systems product family

Cisco HyperFlex HX225c M6 Node family

The Cisco HyperFlex HX225c M6 Node family delivers mission-critical, high performance in a small footprint. Physically, the system is delivered as a cluster of three or more Cisco HyperFlex HX225c M6 (hybrid) or HX225c All Flash nodes. These are integrated into a single system by a pair of Cisco UCS 6300 or 6400 series fabric interconnects, creating clusters that support general-purpose deployments (HX225c M6 Node) and mission-critical high-performance environments (HX225c M6 All Flash Node).

Incorporating AMD EPYC processors and next-generation DDR4 memory, these Cisco HyperFlex HX-series nodes are excellent choices. Cloud-based management makes it easy for you to scale your cluster to support more workloads and deliver performance, efficiency, and adaptability in a 1-Rack-Unit (1RU) form factor.

Powering next-generation applications

Cisco HyperFlex HX225c M6 All Flash and hybrid nodes with AMD EPYC CPUs are excellent for a wide range of enterprise workloads, including cloud computing, Virtual Desktop Infrastructure (VDI), databases including Microsoft SQL Server, Oracle, and SAP, and server virtualization. Cisco HyperFlex Edge configurations, based on the HX225c M6 node and HX245c M6 node, are available to support Remote-Office and Branch-Office (ROBO) locations.

Features and benefits

Table 1. Summary of features and benefits of Cisco HyperFlex HX225c M6 Node and Cisco HyperFlex HX225c M6 All Flash Node

Feature	Benefit
Memory	<ul style="list-style-type: none">• 32 DIMM slots (16 DIMMs per CPU socket), 3200 MHZ DDR4 for up to 4 TB of capacity
AMD EPYC processors	<ul style="list-style-type: none">• One or two 3rd Gen AMD EPYC CPUs
Network	<ul style="list-style-type: none">• Easy deployment in existing edge locations• Use of existing top-of-rack 1 Gigabit Ethernet or 10/25 Gigabit Ethernet switching networks for cluster communication• Support for single and dual switch configurations
Expansion	<p>Rear PCIe risers</p> <ul style="list-style-type: none">• One to three half-height PCIe risers, or• One to two full-height PCIe risers <p>The server provides an internal slot for one of the following:</p> <ul style="list-style-type: none">• Cisco 12G SAS passthrough HBA to control SAS/SATA drives• NVMe drives are controlled directly from the CPUs.• The HX225c M6 node has a single 1-GE management port. A modular LAN-on-motherboard (mLOM) or an Open Compute Project (OCP) 3.0 module provides up to two 100-GE ports. A connector on the front of the chassis provides KVM functionality.

Feature	Benefit
Virtualization optimization	<ul style="list-style-type: none"> The Cisco UCS C225 M6 server can be used either as a standalone or as part of the Cisco Unified Computing System, which unifies computing, networking, management, virtualization, and storage access into a single integrated architecture, enabling end-to-end server visibility, management, and control in both bare-metal and virtualized environments.
Cloud-based management	<p>Cisco Intersight simplifies operations across on-premises data centers, edge sites, and public clouds.</p> <ul style="list-style-type: none"> Use a software-as-a-service platform that bridges applications with infrastructure Gain instant access to clusters regardless of where they are deployed Correlate visibility and management across bare-metal servers, hypervisors, Kubernetes, and serverless and application components Transform operations with artificial intelligence to reach needed scale and velocity Collaborate and work smarter and faster by automating lifecycle workflows Support compliance and governance with extensible, open capabilities that natively integrate with third-party platforms and tools Proactively respond to impending issues with a recommendation engine that determines when capacity needs to be scaled
Storage	<ul style="list-style-type: none"> Up to 10 SAS/SATA/NVMe drives (up to 4 of the drives can be NVMe)
Enterprise data protection	<ul style="list-style-type: none"> Pointer-based snapshot capabilities Native snapshots for iSCSI LUNs, including a consistency group for snapshot operations, instantaneous snapshot creation, and RESTful APIs for snapshot creation and third-party backup use Snapshot integration with MEDITECH BridgeHead for electronic health records and databases Near-instant cloning Inline deduplication and compression Native replication for disaster recovery N:1 replication for data center clusters with fabric interconnects and more than 4 nodes, as well as a flexible retention policy for local and remote point-in-time copies Data-at-rest encryption using self-encrypting drives and enterprise key management integration
Security	<ul style="list-style-type: none"> Locking bezel option to protect against unauthorized access to disk drives
Software	<ul style="list-style-type: none"> Cisco HyperFlex HX Data Platform Software (software subscription, Edge license)

Product specifications

Table 2. Common specifications for Cisco HyperFlex HX225c M6 Node and Cisco HyperFlex HX225c M6 All Flash Node

Capability / feature	Description
Chassis	One-Rack-Unit (1RU) chassis
CPU	One or two 3 rd Gen AMD EPYC CPUs
Memory	32 DIMM slots (16 DIMMs per CPU socket), 3200 MHZ DDR4 for up to 4 TB of capacity
Multi-bit error protection	This server supports multi-bit error protection.

Capability / feature	Description
Video	<p>The Cisco Integrated Management Controller (Cisco IMC) provides video using the Matrox-G200e video/graphics controller:</p> <ul style="list-style-type: none"> • Integrated 2D graphics core with hardware acceleration • Embedded DDR memory interface supports up to 512 MB of addressable memory (8 MB is allocated by default to video memory.) • Supports display resolutions up to 1920 x 1200 16 bpp @ 60 Hz • High-speed, integrated 24-bit RAMDAC • Single-lane PCI-Express host interface running at Gen 1 speed
Power subsystem	<p>Up to two of the following hot-swappable power supplies:</p> <ul style="list-style-type: none"> • 1050 W (AC) • 1050 W (DC) • 1600 W (AC) • 2300 W (AC) <p>One power supply is mandatory; one more can be added for 1 + 1 redundancy.</p>
Front panel	A front-panel controller provides status indications and control buttons.
ACPI	This server supports the Advanced Configuration and Power Interface (ACPI) 4.0 standard.
Fans	Eight hot-swappable fans for front-to-rear cooling
InfiniBand	The InfiniBand architecture is supported by the PCIe slots.
Expansion slots	<p>Three half-height riser slots</p> <ul style="list-style-type: none"> • Riser 1 (controlled by CPU 1): <ul style="list-style-type: none"> ◦ One x16 PCIe Gen 4.0 slot (Cisco VIC), half-height, 3/4 length • Riser 2 (controlled by CPU 1): <ul style="list-style-type: none"> ◦ One x8 PCIe Gen 4.0 slot, half-height, 3/4 length • Riser 3 (controlled by CPU 1): <ul style="list-style-type: none"> ◦ One x16 PCIe Gen 4.0 slot (Cisco VIC), half-height, 3/4 length <p>OR</p> <p>Two full-height riser slots</p> <ul style="list-style-type: none"> • Riser 1 (controlled by CPU 1): <ul style="list-style-type: none"> ◦ One x16 PCIe Gen 4.0 slot (Cisco VIC), full-height, 3/4 length • Riser 2 (controlled by CPU 1): <ul style="list-style-type: none"> ◦ One x16 PCIe Gen 4.0 slot (Cisco VIC), full-height, 3/4 length
Interfaces	<p>Rear panel:</p> <ul style="list-style-type: none"> • One 1GBASE-T RJ-45 management port • One RS-232 serial port (RJ45 connector) • One DB15 VGA connector • Two USB 3.0 port connectors • One flexible modular LAN-on-motherboard (mLOM)/OCP 3.0 slot that can accommodate various interface cards <p>Front panel:</p> <ul style="list-style-type: none"> • One KVM console connector (supplies two USB 2.0 connectors, one VGA DB15 video connector, and one serial port (RS232) RJ45 connector)

Capability / feature	Description
Internal storage devices	<p>Drive storage:</p> <p>Drives are installed into front-panel drive bays, which provide hot-swappable access for SAS/SATA or NVMe drives. The server is orderable in two different versions:</p> <ul style="list-style-type: none"> • HX225c M6 All Flash node (HXAF225C-M6S) <ul style="list-style-type: none"> ◦ Data drives: 6 SATA SSD ◦ Cache drive: 1 NVMe/SAS SSD ◦ Logging drive: 1 SATA SSD • HX225c M6 (hybrid) node (HX225C-M6S) <ul style="list-style-type: none"> ◦ Data drives: 6 SAS HDD ◦ Cache drive: 1 SATA SSD/SAS SSD ◦ Logging drive: 1 SATA SSD
Integrated management controller	<p>A Baseboard Management Controller (BMC) runs Cisco Integrated Management Controller (Cisco IMC) firmware.</p> <p>Depending on your settings, the controller can be accessed through the 1-GE dedicated management port or a Cisco Virtual Interface Card (VIC).</p> <p>Cisco IMC manages certain components within the server, such as the Cisco 12G SAS HBA.</p>
Storage controllers	<p>One Cisco M6 12G SAS RAID controller or up to two Cisco 12G SAS HBAs plug into a dedicated slot.</p> <p>Cisco 12G SAS HBA:</p> <ul style="list-style-type: none"> • No RAID support • JBOD/Pass-through Mode support • Supports up to 16 SAS/SATA internal drives • Plugs into a dedicated slot
Modular LAN-on-motherboard (mLOM) / Open Compute Project (OCP) 3.0 slot	<p>The dedicated mLOM/OCP 3.0 slot on the motherboard can flexibly accommodate the following cards:</p> <ul style="list-style-type: none"> • Cisco Virtual Interface Cards (VICs) • OCP 3.0 network interface card (UCSC-O-ID10GC)
Cisco Intersight	<p>Cisco Intersight provides server-management capabilities.</p> <p>Note: Cisco UCS Manager (UCSM) support is not available for this server.</p>
Cisco Integrated Management Controller	Requires Release 4.2(1) or later
Operating temperature	<p>Minimum 10° C to 35° C (50° F to 95° F) with no direct sunlight (If any A10, A100, or rear HDDs are installed, the 35° C (50° F) restriction changes to 30° C (86° F).)</p> <p>Maximum allowable operating temperature derated</p> <p>1C/300 m (1F/547 ft) above 950 m (3117 ft)</p>

Capability / feature	Description
Extended operating temperature	<p>5° C to 40° C (41° F to 104° F) with no direct sunlight</p> <p>Maximum allowable operating temperature derated 1C/175 m (1F/319 ft) above 950 m (3117 ft)</p> <p>5° C to 4° 5C (41° F to 113° F) with no direct sunlight</p> <p>Maximum allowable operating temperature derated 1C/125 m (1F/228 ft) above 950 m (3117 ft)</p> <p>System performance may be impacted when operating in the extended operating temperature range.</p> <p>Operation above 40° C is limited to less than 1% of annual operating hours.</p> <p>Hardware configuration limits apply to extended operating temperature range.</p>
Nonoperating temperature	<p>Below -40° C or above 65° C (below -40° F or above 149° F)</p> <p>Maximum rate of change (operating and nonoperating)</p> <p>20° C/hr (36° F/hr)</p>
Operating relative humidity	8% to 90% and 24° C (75° F) maximum dew-point temperature, noncondensing environment
Nonoperating relative humidity	5% to 95% and 33° C (91° F) maximum dew-point temperature, noncondensing environment
Operating altitude	0 m to 3050 m {10,000 ft}
Nonoperating altitude	Below 0 m or above 12,000 m (39,370 ft)
Software	Cisco HyperFlex HX Data Platform Software (software subscription, Edge license)

Ordering information

For a complete list of part numbers, refer to the Cisco HyperFlex HX225 M6 Edge All Flash and hybrid server nodes specification sheet.

Cisco Unified Computing Services

Cisco and our industry-leading partners deliver services that accelerate your transition to Cisco HyperFlex systems. Cisco Unified Computing Services can help you create an agile infrastructure, accelerate time-to-value, reduce costs and risks, and maintain availability during deployment and migration. After you have deployed your system, our services can help you improve performance, availability, and resiliency as your business needs evolve and help you further mitigate risk.

Cisco environmental sustainability

Information about Cisco's environmental sustainability policies and initiatives for our products, solutions, operations, and extended operations or supply chain is provided in the "Environment Sustainability" section of Cisco's [Corporate Social Responsibility](#) (CSR) Report.

Reference links to information about key environmental sustainability topics (mentioned in the "Environment Sustainability" section of the CSR Report) are provided in the following table:

Sustainability topic	Reference
Information on product material content laws and regulations	Materials
Information on electronic waste laws and regulations, including products, batteries, and packaging	WEEE compliance

Cisco makes the packaging data available for informational purposes only. It may not reflect the most current legal developments, and Cisco does not represent, warrant, or guarantee that it is complete, accurate, or up to date. This information is subject to change without notice.

Cisco Capital

Flexible payment solutions to help you achieve your objectives

Cisco Capital makes it easier to get the right technology to achieve your objectives, enable business transformation and help you stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services and complementary third-party equipment in easy, predictable payments. [Learn more](#).

How to buy

To view buying options and speak with a Cisco sales representative, go to www.cisco.com/c/en/us/buy.html.

For more information

For more information about Cisco HyperFlex systems, refer to <https://www.cisco.com/go/hyperflex>.

Document history

New or revised topic	Described in	Date
Initial release	Spec sheet	March, 2022

Cisco HyperFlex systems with AMD EPYC processors



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)